


Permanent Pot Hole Repair Information Sheet

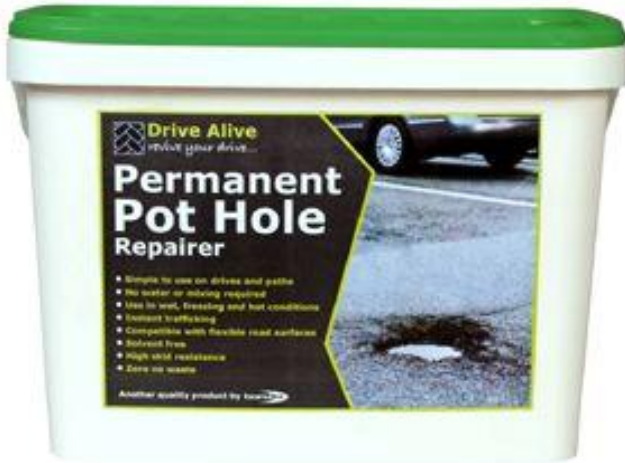

Description

This affordable and reliable product is an easy repair solution for all pot holes, making good trenches, weed and root damage repair and fractured edging. It is compatible with existing road surfaces and features many advantages, such as the fact it can be applied in all weathers, including rain and it is instantly trafficable. In addition, it offers high skid resistance due to the specially formulated bitumen and interlocking aggregate.

Directions for use:

PERMANENT POT HOLE REPAIRER can be applied at depths between 20mm - 100mm (0.7 – 3.9 inches). Greater depths can be achieved by applying the layer-on-layer method.

Areas of Use

- Roads
- Pavements
- Driveways
- Carparks
- It can be used on corrugated cement fibre roofing sheets and block and beam roofs for waterproofing and solar reflectivity.

Key Benefits

- Used in wet, freezing and hot conditions
- No special preparation required
- Instant trafficking
- Recyclable Packaging
- Compatible with flexible road surfaces
- Solvent free
- Ready to use – No need to add water
- Polished stone value 60 psv
- Absolutely no waste
- Environmentally friendly – No Co² gases

Application:

- Chip away fractured tarmac from around the edges until the surface is sound. Ensure the pothole is free from debris and standing water.
- To ensure the best possible durability to your repair, it is recommended that the edges of the existing surfaces be sealed with SkilledBuild Bitumen Cold Joint Sealer.
- Fill the pothole with pothole repair product straight from the tub. It is recommended that when applying over a concrete or smooth base or to obtain best adhesion, the base of the hole should be primed with SkilledBuild Tack Adhesive or use SkilledBuild Bitumen Cold Joint Sealer for small areas.
- Apply product slightly higher than the pothole. Tamp down to fully compress the repair and achieve the desired finish height. Use a SkilledBuild Tarmac Tamper or similar. Small areas may be successfully compressed using a lump hammer and a hardwood pad.
- Repairs exceeding 40mm in depth should be built-up in layers not exceeding 40mm, with each layer being consecutively tamped and compressed prior to the next layer being applied.
- Tamp down to compact the material to complete the application. If initial section being tamped is too high or lower than the surrounding surface, then add or remove a layer of the uncompressed repair product so that the compacted area will finish as required.



Permanent Pot Hole Repair Information Sheet

Product Data

Appearance: Black Aggregate

Coverage: 1m² x 15mm (compacted)

Packaging: 25kg

Colour: Black

Shelf Life: In correct conditions for sealed goods is 6 months.

Storage: Store in a cool and well-ventilated place.

Important Information

SkilledBuild is committed to development and supply of quality products and may substitute or change product branding or specification or technical data without notice. Always check for latest information.

All information provided is based on practical tests & published data and is intended to guide a competent DIY user or contractor in the typical use of products for minor works but is without guarantee. If a failure of the works will be costly to repair or hazardous then design & execution must be undertaken by competent persons. Further advice should be sort from a suitably qualified advisor. Skilled Build may be able to answer simple product enquiries.

Since application and working and user competence is beyond our control, no liability of the supplier can be derived from the contents of information sheets or other general information provided. Any statements made beyond the contents of SkilledBuild's website or product labels must be confirmed in writing by the supplier.

- SkilledBuild Tarmac Repairer will provide a 'new black tarmac' appearance to the repair where the surrounding tarmac may look old and worn. This difference will blend in time. A uniform appearance of fresh tarmac can be achieved by overlaying areas using SkilledBuild Tarmac Restorer.

Disposal of Containers:

Do not leave empty containers where residue could be harmful to children, animals or the environment. Replace lids and remove any containers to a central disposal point in accordance with local regulations.

Safety:

- SkilledBuild Pothole repairer is a low hazard product in normal storage and usage.
- It is recommended that suitable gloves and eye/face protection and safety boots should be worn. Ear defenders should be considered when tamping creates impact noise or is in a confined area.
- In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice.
- After contact with skin, wash immediately with plenty of soap and water. If symptoms persist, seek medical attention.
- Do Not Ingest. In the event of ingestion, do not induce vomiting, seek medical attention.
- Use product in well ventilated areas. If respiratory problems are experienced, keep at rest and seek immediate medical attention.
- Keep out of reach of children and always store in original labelled container.
- Some people are more sensitive to chemical products than others, if irritation occurs, stop using the product. Seek medical advice if symptoms are severe or persistent.